

Nylon Cable Ties 尼龍扎綫帶


Push Mount Cable Ties 插銷式扎綫帶

Description

Push-Mount Cable Tie is a one-piece wire management solution that saves time by combining quick and easy snap-in mounting with a pre-assembled wire tie.


Feature:

- Greater resistance to damage caused by ultraviolet light - indoor or outdoor use.
- Used to attach bundles to another surface such as a flat panel.
- Combines cable tie, mount and fastener into a single part.
- Anchor is easily pressed into a pre-formed hole and locks in place.



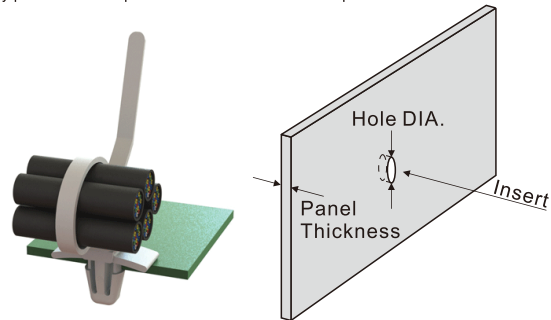


Wing Push Mount Type Available Size

Part No. 货号	Item Code 型号	Length 长度	Width 宽度	Mini Tensile Strength 最小拉力	Maxi Bundle Diameter 最大捆扎范围	Hole Diameter 最大孔径	Panel Thickness 面板厚度
		mm	mm	lbs Kg	mm	Ø(mm)	mm
5850	Q100M-WPM	100	2.5	18 8	22	4.8	2.4
5852	Q150I-WPM	150	3.6	40 18	35	4.0	2.0
5854	Q200I-WPM	200	3.6	40 18	50	4.0	2.0
5856	Q120S-WPM	120	4.8	50 22	25	6.4	3.2
5858	Q160S-WPM	160	4.8	50 22	38	6.4	3.2
5860	Q190S-WPM	190	4.8	50 22	45	6.4	3.2

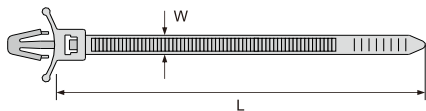

Releasable Push Mount Tie

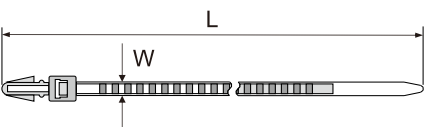

Releasable Push Mount Type Available Size

Part No. 货号	Item Code 型号	Length 长度	Width 宽度	Mini Tensile Strength 最小拉力	Maxi Bundle Diameter 最大捆扎范围	Hole Diameter 最大孔径	Panel Thickness 面板厚度
		mm	mm	lbs Kg	mm	Ø(mm)	mm
5870	Q135S-RPM	135	7.3	40 18	30	6.8	3.2
5872	Q160S-RPM	160	8.0	40 18	40	10	3.2



Barb Push Mount Type Available Size

Part No. 货号	Item Code 型号	Length 长度	Width 宽度	Mini Tensile Strength 最小拉力	Maxi Bundle Diameter 最大捆扎范围	Hole Diameter 最大孔径	Panel Thickness 面板厚度
		mm	mm	lbs Kg	mm	Ø(mm)	mm
5880	Q150I-BPM	150	3.6	40 18	35	5.2	2.8
5882	Q200S-BPM	200	4.8	50 22	50	6.3	3.6

